*AUXILIARY INPUT SOCKET**

Auxiliary (AUX) input socket

The AUX input socket allows play back of an external audio source e.g. a portable MP3 player via the audio system speakers.

The AUX input socket is located on the centre console next to the park brake.

Note

- Always keep the AUX input socket clean and dry.
- The maximum allowable effective output voltage of any external audio source is 1.5 volts.

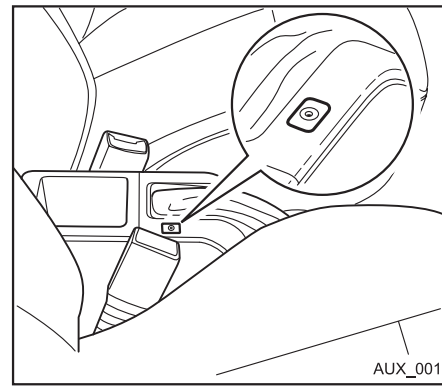

To enable the AUX input socket

1. Turn the audio system on.
2. Connect an external audio source to the AUX input socket.
3. Press the TUNER button ❺ until **AUX** appears on the display.
4. Turn the external audio source on and set its volume control to maximum.

   Refer over leaf for *AUX input volume adjustment.*
5. The external audio source is transferred through to the audio system speakers.

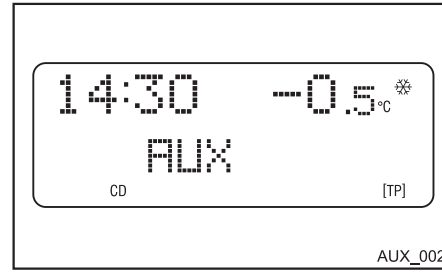

Steering wheel remote controls

The steering wheel remote controls can be used to change the selected audio source. Press button ❸ to change between radio, CD/MP3 and AUX mode.

*The asterisk signifies equipment options not in all vehicles, model variants, engine options, optional equipment and Genuine Holden Accessories (and Parts).

This supplement should be kept together with the owner's handbook in the glovebox of your vehicle.

*AUXILIARY INPUT SOCKET**

VOLUME ADJUSTMENT

The play back volume of an external audio source can be adjusted via the volume control on the audio system or the steering wheel control.

AUX input volume adjustment

This function can be used to adjust the AUX input level in relation to the other audio sources. This function is available only when the AUX audio source is enabled.

Note In the case of an external audio source using Line-out, the output signal is set to a specific level and cannot be changed.

1. Set the external audio source volume control to maximum.
2. Press the SETTINGS button ⓭.
3. Depending on the display type, Audio or the Settings menu will be displayed.
4. Press the OK button ⓾.

   AUX Vol. and the set value appear on the display.
5. Adjust the value from -12 to +12 with the arrow buttons ❼ or ⓫.
   - The settings are applied automatically.
   - TID and BID[1]): after about 5 seconds, AUDIO appears on the display, followed by the relevant audio source.
   - MID[1]): after about 5 seconds, the Settings menu appears on the display.

   [1)] Refer to page 1B-7 of the owner's handbook.

   After changing your settings, press the SETTINGS button ⓭ again, and move back one level in the Settings menu.

   Once you have changed settings, press one of the function buttons TUNER ❺, CD/MP3 ❾ or BC ❻ to display the relevant function.

Troubleshooting

Error message/symptom	Possible cause/action
AUX source too quiet.	Check the AUX input level. Set the external audio source volume control to maximum.
The AUX source is overridden or played back with distortion.	Effective output voltage of the external audio source is to great. External audio source is not suitable for connection to the audio system.

Refer to chapter 1B of the owner's handbook for audio system operating instructions.

Printed in Australia

Part No. 92217385
August 2007 (AH Astra auxiliary input socket. Print 1)

© 2007 GM Holden Ltd
Reproduction in whole or part is prohibited
without written approval from GM Holden Ltd,
ABN 84 006 893 232

HOLDEN

GM Holden Ltd, ABN 84 006 893 232 (hereinafter Holden)

This supplement should be kept together with the owner's handbook in the glovebox of your vehicle.